


DATA SHEET

Product Features

TRADITIONS™ 2" WOOD BLINDS

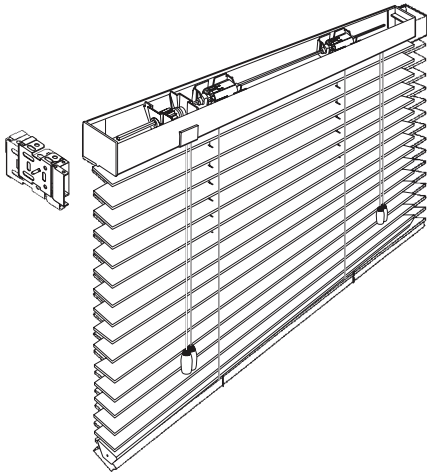

- Slats exclusively North American hardwood harvested through the practice of "sustained yield forest management"
- SureClose headrail system
- Trapezoid shape bottomrail
- PureGrain™ finish
- NoHoles™ option
- Cloth tape option
- 1" and 2-3/8" slat option
- 2-1/2" shutter style slat option
- Wood tassels
- Lifetime headrail warranty

Product Specifications

TRADITIONS™ 2" WOOD BLINDS

SureClose® headrail shall be 1-5/8" high x 2-1/4" wide x .022" thick U-shaped steel with 1/8" light blocking lip on the bottom center line. The steel finishing process includes phosphate treatment for corrosion resistance, a chrome-free sealer, a low HAP urethane primer and a topcoat with low HAP polyester baked enamel.

Cord tilter shall be a snap-in component incorporating a worm and pulley of low-friction thermoplastic and a nylon gear. Tilt cords shall be secured to pulley and treated with wood tassels at tilt end. Cord tilter is standard.

The rod shall be electro-zinc coated solid steel measuring 1/4" square.

Cord lock shall be of a snap-in design incorporating a floating, shaft-type locking pin and shall incorporate a crash proof safety feature that will lock blind automatically upon release of cord.

Drums shall be made of high strength thermoplastic, which securely anchors braided ladder or cloth tapes.

Installation brackets shall be a rivet-hinged front cover phosphate-treated steel with urethane primer and polyester baked enamel finish to match headrail.

Braided ladder shall be made of 100% polyester incorporating two extra strength rungs per ladder to support slats. Standard ladder spacing is 44mm.

Slats shall be made from North American hardwood and are resistant to warping, Slats shall be 2" wide x 1/8" thick.

Bottomrail shall be 5/8" high x 2" wide wood in a trapezoid shape to improve closure and finished to coordinate with slats.

- Options:
- 1" slat
 - 2-3/8" slat
 - 2-1/2" shutterstyle slat
 - NoHoles™ slats
 - Wand tilter
 - Cloth tapes 1-1/22" or 1"
 - Ring pull
 - Ring tilter
 - Extension brackets
 - Hold down brackets
 - Cut outs